FLUTED WALL PANEL INSTALLATION GUIDE



1. FOR INSTALLATION OF INDOOR FLUTED PANEL, FIRST MARK THE STARTING LINE OF WALL SURFACE



2. AFTER MARKING THE WALL SURFACE AREA. GLUE THE INDOOR PANEL PARALLEL TO THE STARTING LINE, MAKE SURE THE EDGE OF MALE SIDE OF PANEL IS ADJACENT TO STARTING LINE.



3. TO SECURE THE PANEL AFTER GLUED TO THE WALL. INSTALL THE CLIPS ON THE FEMALE SIDE OF THE PANEL IN EVERY 500MM.



4. REPEAT THE PROCESS UNTIL IT COVERS THE

DESCRIPTION:

DESCRIPTION:

Create clean, crisp, continuous channels and shadow lines with Fluted Panel.

Features Quick and easy installation Interlocking profile for consistent alignment and integrity an interlocking tongue has been specially designed to allow for secret fixing Outstanding acoustic properties Perfectly straight lines and shadows High wood density and coarse texture Long lasting, Paint free and Waterproof Using high density antiseptic organic formula Well solve of generic wood rot problem, no painting is required to cope with extreme environments. Low flame-spread. Our composites are using difficult to burn compounds to provide extra layer of protection in the occasion. And delighted by FSC high polymer to optimize the wood fiber structure which prevent insect foraging as the same go.

PURPOSE AND USE:


The most widely used decorative materials.

It's easy to install and the unique features in decorative effect help it attain widely recognition.

ADVANTAGE:

WHERE TO APPLY

Wall decoration, Ceiling decoration, Space divide, Signage back board, Object wrapping

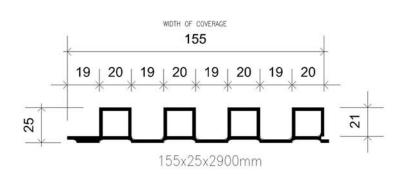



SIZE:155 x 25 x 2900mm MATERIAL : WPC (WOOD PLASTIC COMPOSITE)



